

SERIE LADY - Mod. 300 ES CEV



Affilatoio fisso.
Fixed sharpener.



Pressamerce con protezione in plexiglass.
Food-holder arm with protection in plexiglass.


Caratteristiche

- Basamento in alluminio fuso con ossidazione anodica lucida.
- Coprilama e piatto in alluminio fuso con ossidazione anodica lucida.
- Albero portalama montato su doppio cuscinetto a sfere.
- Motore professionale ventilato.
- Lama professionale, temperata, rettificata e cromata a cromo duro.
- Anello fisso di protezione della lama.
- Pressamerce in alluminio protetto con ossidazione anodica.
- Vela in alluminio fuso con ossidazione anodica lucida.
- Spessore di taglio fino a 14 ÷ 16 mm.

Features

- Base in cast aluminium with polished anodic oxidation.
- Blade cover and food tray in cast aluminium with polished anodic oxidation.
- Shaft holding the blade mounted on a double ball-bearing.
- Professional ventilated motor.
- Professional tempered ground hard chromium-plated blade.
- Fixed blade protection ring.
- Food holder arm in anodized aluminium.
- Sail-shaped rest in cast aluminium with polished anodic oxidation.
- Slicing thickness up to 14 ÷ 16 mm.

DIMENSIONI - DIMENSIONS

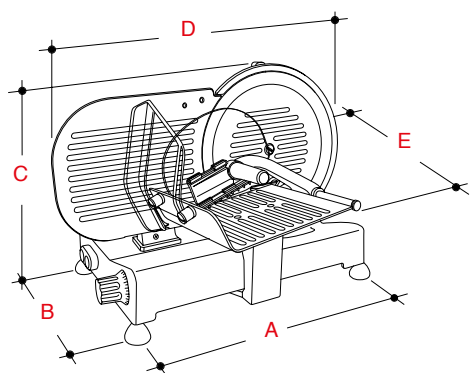

A	B	C	D	E
mm	mm	mm	mm	mm
415	263	390	520	410



Manopola graduata ed interruttore per centralina CEV.
Graduated knob and switch linked to CEV control unit.

SERIE LADY	Diametro lama Blade diameter	Potenza motore Power	Capacità di taglio Cutting capacity	N° giri lama Saw blade speed	Corsa carrello Trolley run	Peso netto Net weight	imballo Packing
	mm	Watt	±5 mm	g/min. (RPM)	mm	Kg	cm
MOD 300 ES CEV	300	180	210 x 180	320	255	17,5	49x58x45 (0,13m³)